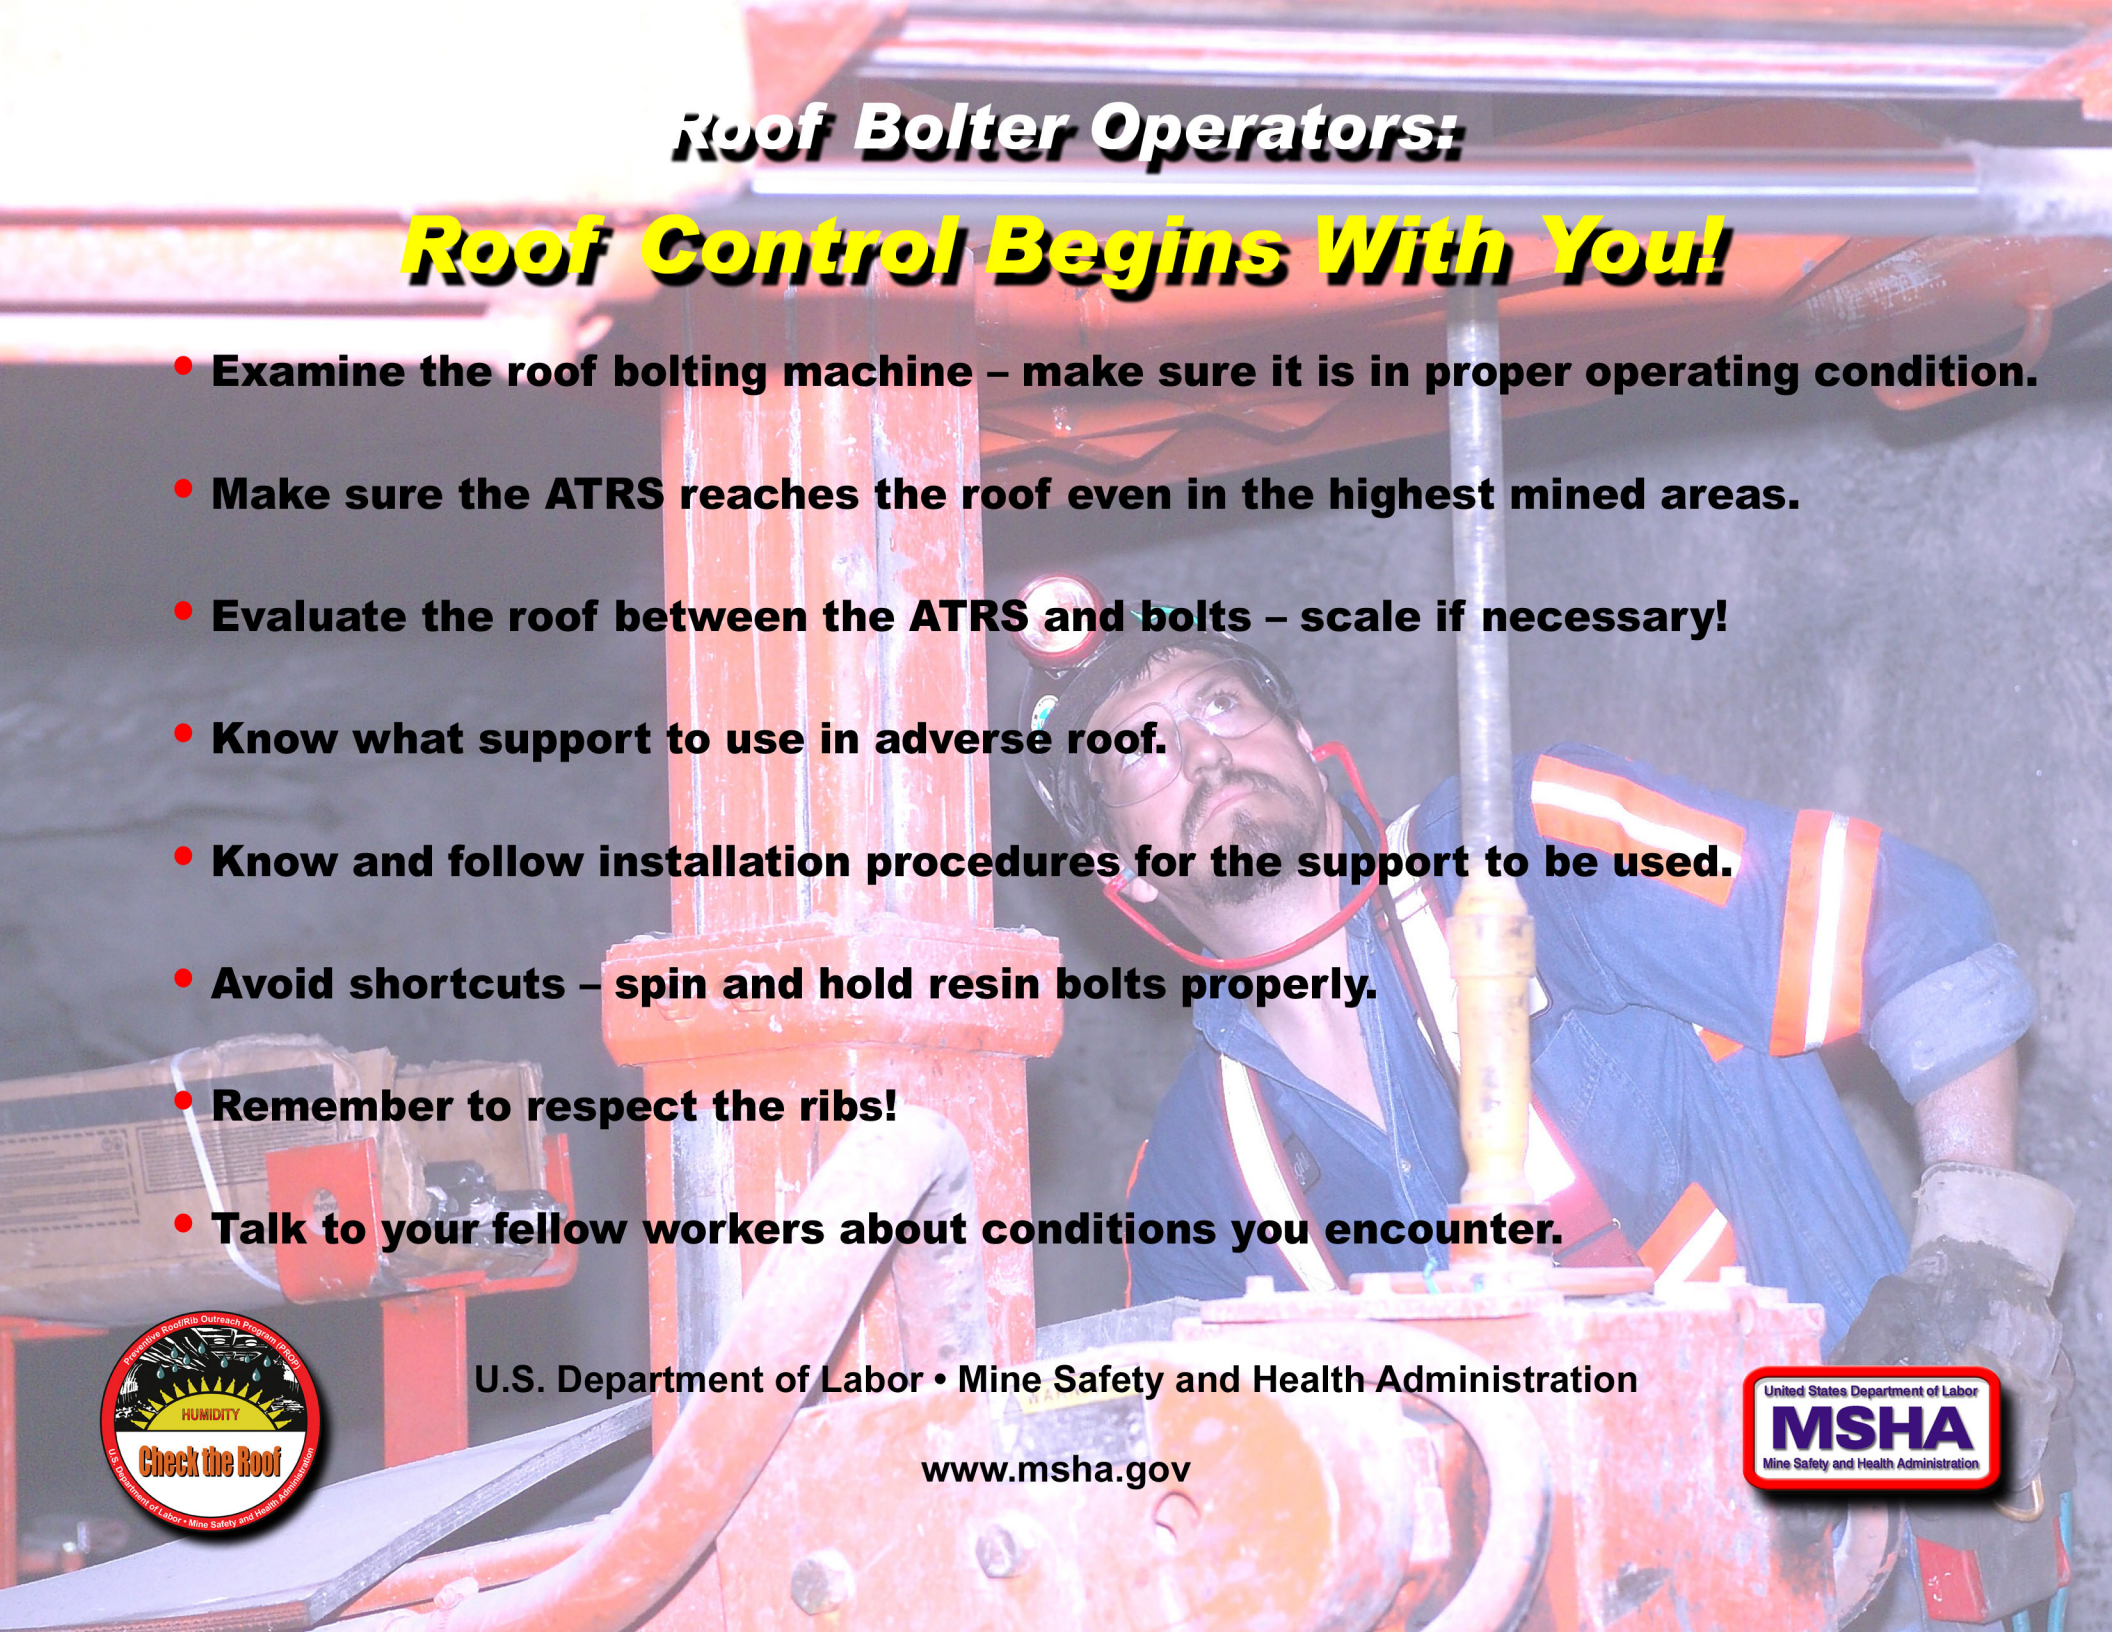

# Roof Bolter Operators:

# Roof Control Begins With You!

- Examine the roof bolting machine – make sure it is in proper operating condition.
- Make sure the ATRS reaches the roof even in the highest mined areas.
- Evaluate the roof between the ATRS and bolts – scale if necessary!
- Know what support to use in adverse roof.
- Know and follow installation procedures for the support to be used.
- Avoid shortcuts – spin and hold resin bolts properly.
- Remember to respect the ribs!
- Talk to your fellow workers about conditions you encounter.

Preventive Roof/Rib Outreach Program (PROP)
HUMIDITY
Check the Roof
U.S. Department of Labor • Mine Safety and Health Administration

U.S. Department of Labor • Mine Safety and Health Administration

www.msha.gov

United States Department of Labor
MSHA
Mine Safety and Health Administration